

asnalog - noguera

Logistics and cargo-handling equipments



Commercial presentation

INDEX

- 1 Introduction
- 2 Technical specifications
- 3 Fixed platform
- 4 Mobile trailer platform with wheels
- 5 Platform for loading containers on the ground
- 6 Platform with automatized displacement system
- 7 Pneumatic fork for manual loading and unloading
- 8 Video gallery



INTRODUCTION

NOGUERASA-ASNALOG is a Spanish company with over **15** years of experience in the manufacture and development of container loading and unloading platforms and handling systems.

We have now installed more than **350** platforms worldwide (we are present in more than **40** countries) for loading and unloading shipping containers carrying goods of different types and characteristics.

For example: steel profiles, metal structures, tubes, aluminium ingots, panels, machinery, steel coils, graphite billets, etc.



TECHNICAL SPECIFICATIONS

- Maximum load: **28000 kilograms**
- Load capacity per metre: **From 4 to 8 tonnes**
- Loading bay: **6 meters - 12 meters - 13,5 meters / 20' - 40' - 45'**
- Working range: **380 - 480 volts / 50 - 60 Hz**
- Working range of pneumatic pressure: **6-8 Bar**
- Comprehensive management via wireless keypad
- Power unit: Planetary gear motor of **5,5kw**
- **Marked C** itself, as well as all components
- **2 year** warranty against any defect or manufacturing fault in all components
- Technical service - Commitment and assistance between **24 and 48 hours**



FIXED PLATFORM (LOADING AND UNLOADING ON TRUCK CHASSIS)

- Load capacity: **28 ton - 4 - 8 ton/mt**
- Indoor and outdoor installation
- Suitable for use at temperatures between **-20°C to 80°C**
- Surface treatment with exterior paint or hot-dip galvanising
- Transport and installation by Noguerasa-Asnalog technicians **(included in price)**



MOBILE TRAILER PLATFORM

(NOT APPROVED FOR USE ON
CONVENTIONAL ROADS AND HIGHWAYS)

- Load capacity: **28 ton - 4 - 8 ton/mt**
- Indoor and outdoor installation
- Suitable for use at temperatures between **-20°C to 80°C**
- Pneumatic system for towing by means of external traction elements, equipped with its own air compressor
- Platform designed to be used in installations with multiple loading points
- Transport and installation by Noguerasa-Asnalog technicians **(included in price)**




PLATFORM FOR LOADING CONTAINERS ON THE GROUND

- Specifically designed for port terminals
- Load capacity: **28 ton - 4 - 8 ton/mt**
- Indoor and outdoor installation
- Suitable for use at temperatures between **-20°C to 80°C**
- **Operational:** The container, whether 20, 40 or 45', will be positioned using handling equipment (**Reach staker**) **For example:** On pivot points fixed to the ground at their measurements. Once the filling/emptying activity is complete, the container will be removed by the same equipment, leaving the positioning area free
- Transport and installation by Noguerasa-Asnalog technicians (**included in price**)





PLATFORM WITH AUTOMATIZED DISPLACEMENT SYSTEM

- Load capacity: **28 ton - 4 - 8 ton/mt**
- Preferably installed inside warehouses and recommended for **multidock services**.
- Fully automated platform equipped with motion, detection and presence sensors, in accordance with the regulations required for **CE marking**.
- **Operational:** The platform can be moved to the area where the different loads are stored in order to pick them up and then move to the door or area where the container will be filled (and/or emptied)
- Lateral and/or longitudinal movement by a rail

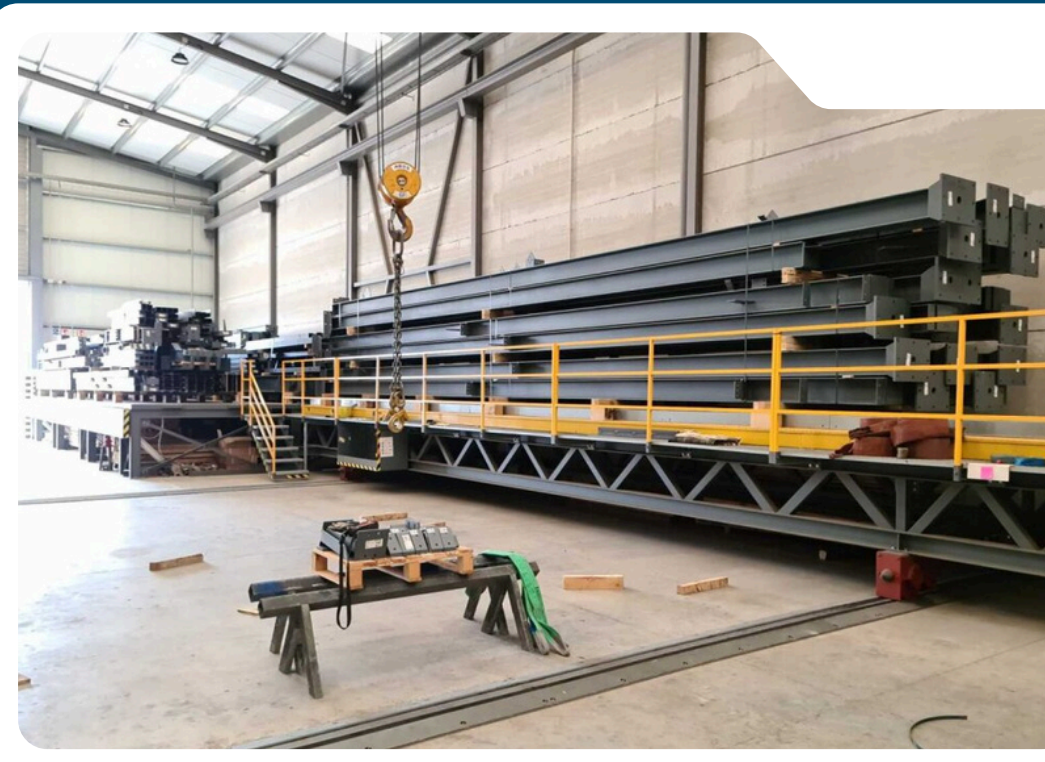

PNEUMATIC FORK FOR MANUAL LOADING AND UNLOADING

- Load capacity: **28 ton - 4 - 8 ton/mt**
- Indoor and outdoor installation
- Suitable for 100% manual use, being moved by external means

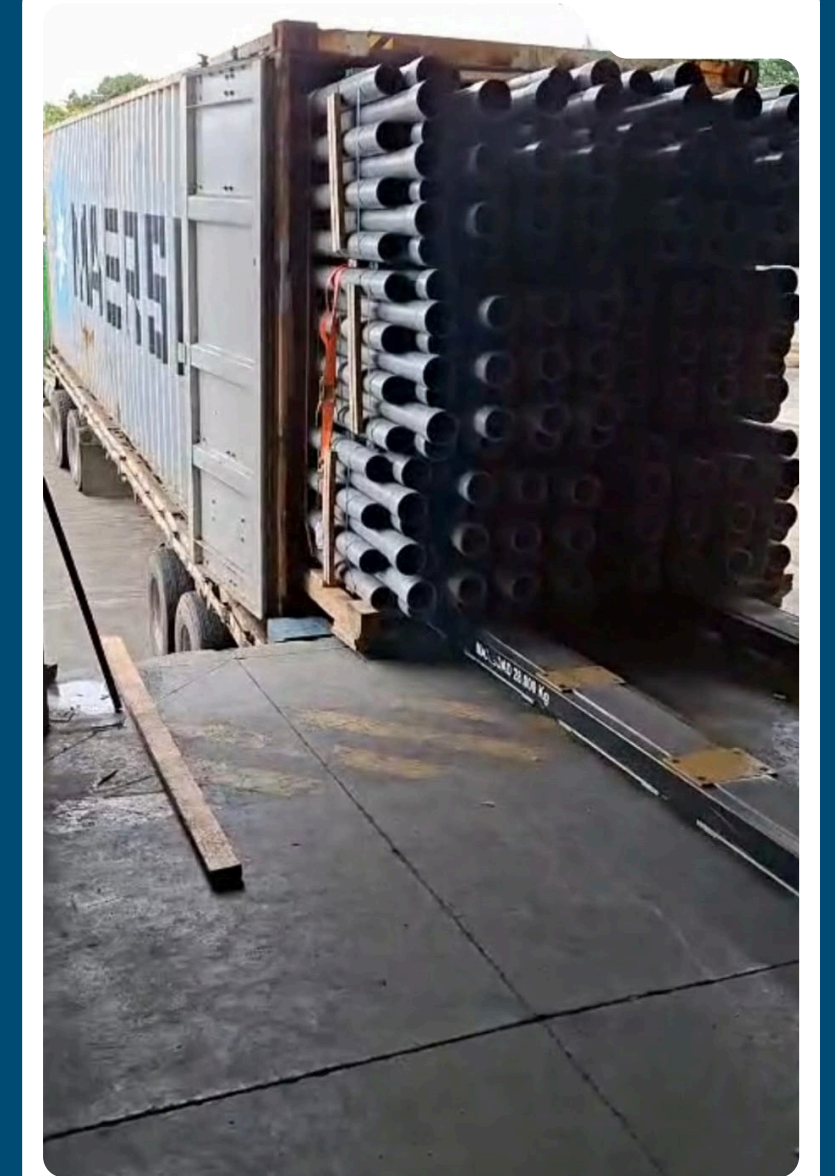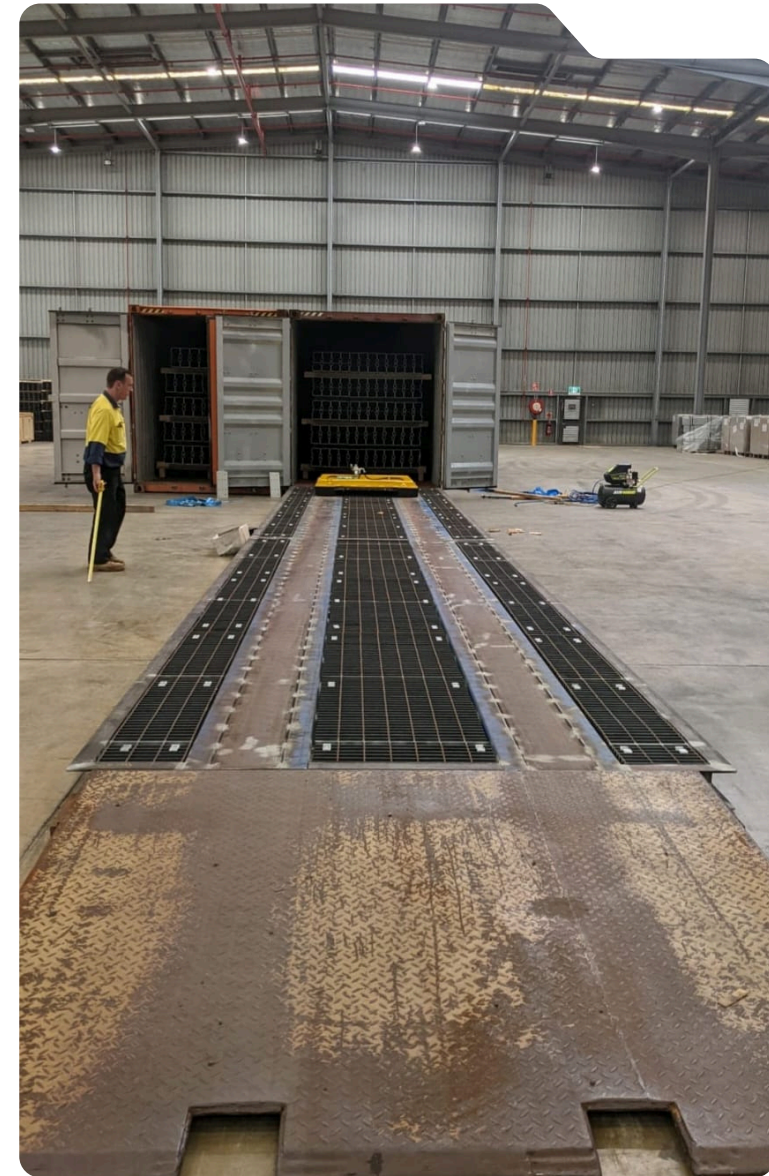

VIDEO GALLERY (PLATFORMS IN MOTION)



MOBILE TRAILER PLATFORM WITH WHEELS



MOBILE TRAILER PLATFORM WITH WHEELS



MOBILE TRAILER PLATFORM WITH WHEELS



FIXED PLATFORM (LOADING AND UNLOADING ON TRUCK CHASSIS)



PLATAFORM FOR LOADING CONTAINERS ON THE GROUND



MOBILE TRAILER PLATFORM WITH WHEELS

VIDEO GALLERY (PLATFORMS IN MOTION)



PNEUMATIC FORK FOR MANUAL LOADING AND UNLOADING




PLATFORM WITH AUTOMATIZED DISPLACEMENT SYSTEM




FIXED PLATFORM (LOADING AND UNLOADING ON TRUCK CHASSIS)

VIDEO GALLERY (PLATFORMS IN MOTION)

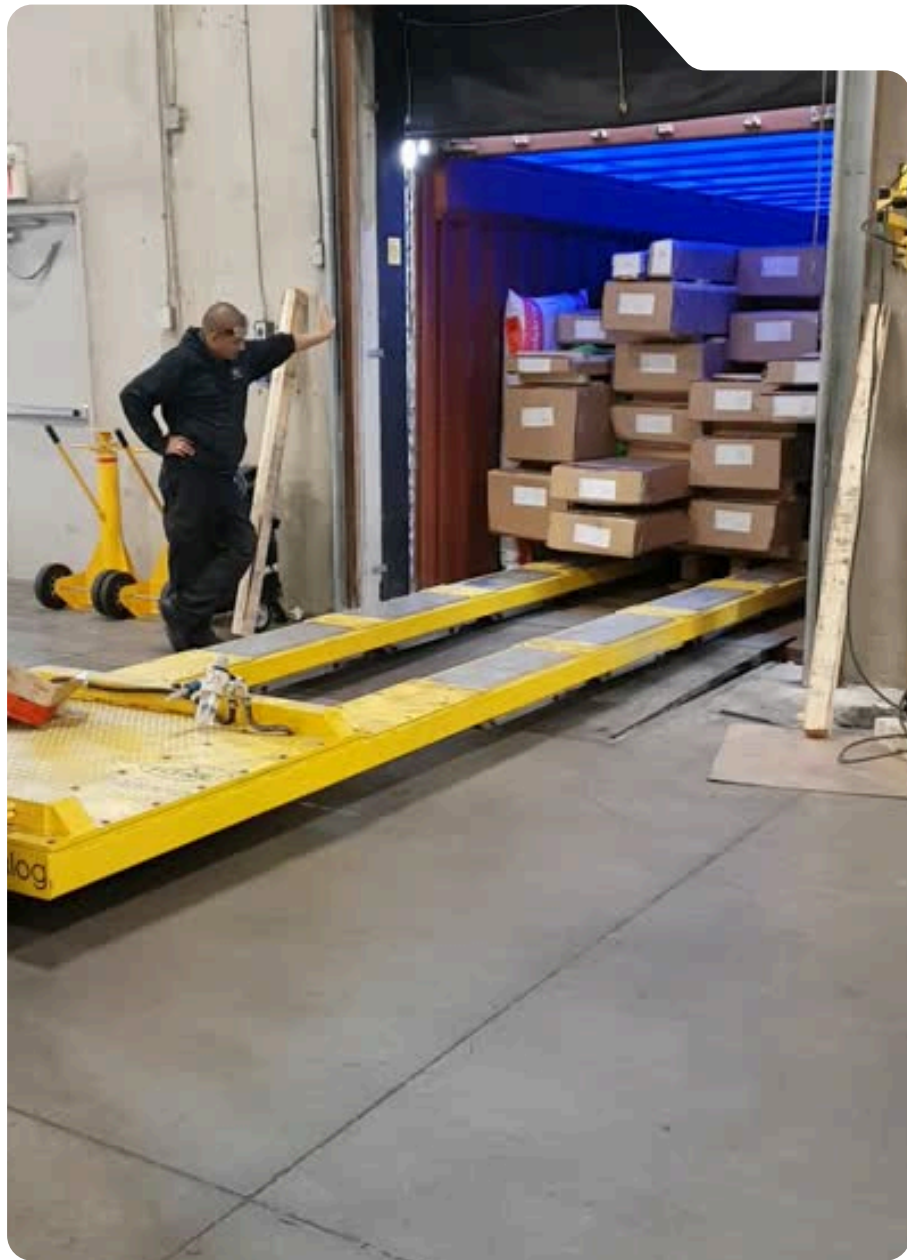

PNEUMATIC FORK FOR MANUAL LOADING AND UNLOADING

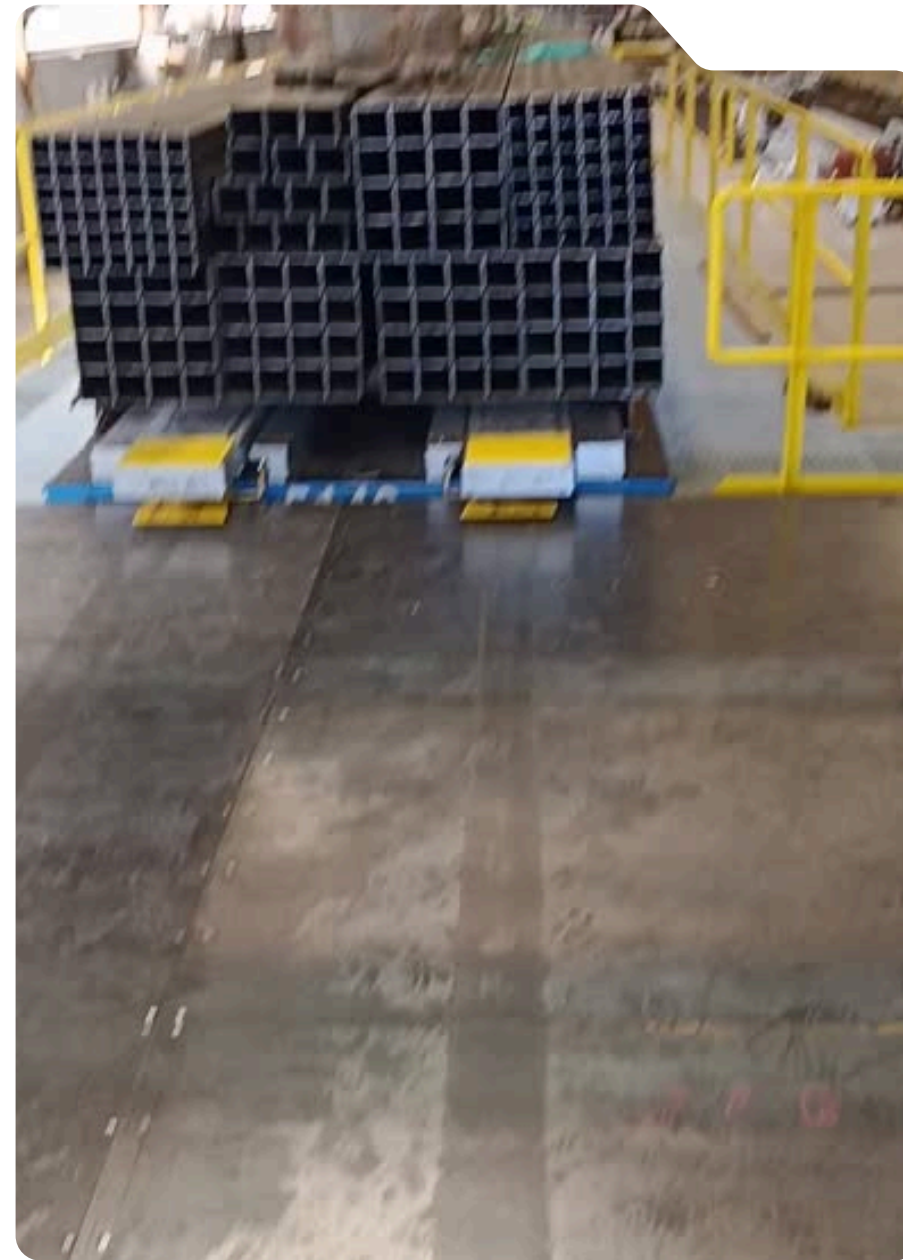

PLATFORM WITH AUTOMATIZED DISPLACEMENT SYSTEM



FIXED PLATFORM (LOADING AND UNLOADING ON TRUCK CHASSIS)

VIDEO GALLERY (PLATFORMS IN MOTION)



PNEUMATIC FORK FOR MANUAL LOADING AND UNLOADING



PNEUMATIC FORK FOR MANUAL LOADING AND UNLOADING

CONTACT



Email

jrcid@noguerasa.es



Social Media

Asnalog-Noguera



Telephone

+34 670 034 689



Website

www.asnalog.es

¡THANK YOU!



asnalog
noguera

